

DRABEST

DESIGNED FOR YOUR SAFETY

CATALOGUE 2025

- LADDERS
- SCAFFOLDING
- LADDER HOISTS
- ACCESSORIES



PRODUCT COMPARISON

SINGLE-SIDED ACCESS LADDERS	2
DOUBLE-SIDED ACCESS LADDERS	2
THREE-ELEMENT LADDERS	3
TELESCOPIC LADDERS	4
UNIVERSAL LADDERS	5
LADDER SCAFFOLDING	6
LADDER SCAFFOLDING HECTOR/IKAR	7

LADDER HOIST

SINGLE-SIDED ACCESS LADDERS

ALD 125 KG + HOOK - HOME	14
ALD 125 KG + SHELF - HOME	15
ALD 150 KG + HOOK - PRO	16
ALD 150 KG + SHELF - PRO	17
ALD 150 KG +SHELF+HANDRAILS - PRO	18
ALD MAX 150 KG - MAX	19
FIBREGLASS 150 KG - MAX	20
STD 125 KG - HOME	21
MINIFERO 150 KG - PRO	22
KS 150 KG - HOME	23
ST TW 150 KG - HOME	24
PLATFORM HOP UP 150 KG - PRO	25

DOUBLE-SIDED ACCESS LADDERS

DD 125KG - HOME	28
DD 150 KG - PRO	29
DREW 150 KG - PRO	30

TELESCOPIC LADDERS

TELESCOPIC 125 KG - HOME	34
TELESCOPIC 150 KG - MAX	35

2 - 7

2
2
3
4
5
6
7

LEANING LADDERS

DP 150 KG - PRO	38
-----------------	----

TWO-ELEMENT LADDERS

DW 2 150 KG - HOME	42
DW 2 150 KG - PRO	43

THREE-ELEMENT LADDERS

DW 3 150 KG - HOME	46
DW 3 150 KG - PRO	47
DW 3 150 KG - MAX	48

36 - 39

38

40 - 43

42
43

44 - 49

46
47
48

UNIVERSAL LADDERS

DU 4X3-4X4 125 KG - HOME	52
DU 4X3 125 KG + PLATFORM - HOME	53
DU 4X3 125 KG AL-ST - HOME	54
DU 4X3 125 KG + PLATFORM AL-ST - HOME	55
DU 4X3 150 KG - HOME	56
DU 4X3 150 KG + PLATFORM - MAX	57

50 - 57

52
53
54
55
56
57

LADDER SCAFFOLDING

ARD 150 KG - HOME	60
ARD 150 KG - PRO	61
IKAR 150 KG - PRO	62
HECTOR 160 KG - PRO	63
HECTOR BASIC 150 KG - PRO	64

58 - 65

60
61
62
63
64

ACCESSORIES

FIRE ESCAPE LADDERS

ABOUT OUR COMPANY

66 - 73

74 - 79

80

CHOOSE THE BEST LADDER!

CATEGORIES

SINGLE-SIDED ACCESS LADDERS

ALD



LOAD CAPACITY

125 KG

150 KG

150 KG

PROFILE THICKNESS

0,8 mm

1,2 mm

model 3-6
1,2 mm

model 7-8
1,4 mm

USAGE



QUALITY / CERTIFICATE

DECLARATION OF CONFORMITY
125 KG

CERTIFICATE
EN 131
PROFESSIONAL USE



CERTIFICATE
EN 131
PROFESSIONAL USE

CATEGORIES

DOUBLE-SIDED ACCESS LADDERS

DD



LOAD CAPACITY

125 KG

150 KG

PROFILE THICKNESS

0,8 mm

1,2 mm

USAGE





















QUALITY / CERTIFICATE









DECLARATION OF CONFORMITY
125 KG



THREE-ELEMENT LADDER - WHICH ONE TO CHOOSE?

CATEGORIES	THREE-ELEMENT LADDERS																										
																											
DW3																											
MODELS	6-11	6-16	7, 9, 11, 13																								
RUNG PROFILE	25x25 mm	28x28 mm	28x28 mm																								
USAGE	 	 	 																								
DISTANCE BETWEEN RUNGS	265 mm	265 mm	290 mm																								
FUNCTION ON STAIRS																											
FEET	STANDARD BLACK 	TWO COMPONENT 	MOVABLE DOUBLE-SIDED 																								
STABILIZER LENGTH	<table><tr><td colspan="3">[mm]</td></tr><tr><td>675 models 6, 7</td><td>860 models 8, 9, 10</td><td>980 model 11</td></tr></table>	[mm]			675 models 6, 7	860 models 8, 9, 10	980 model 11	<table><tr><td colspan="3">[mm]</td></tr><tr><td>700 model 6</td><td>825 models 7, 8</td><td>900 model 9</td></tr><tr><td colspan="3">[mm]</td></tr><tr><td>974 model 10</td><td>1100 models 11, 12</td><td>1200 models 13-16</td></tr></table>	[mm]			700 model 6	825 models 7, 8	900 model 9	[mm]			974 model 10	1100 models 11, 12	1200 models 13-16	<table><tr><td colspan="3">[mm]</td></tr><tr><td>900 model 7</td><td>1100 model 9</td><td>1200 models 11, 13</td></tr></table>	[mm]			900 model 7	1100 model 9	1200 models 11, 13
[mm]																											
675 models 6, 7	860 models 8, 9, 10	980 model 11																									
[mm]																											
700 model 6	825 models 7, 8	900 model 9																									
[mm]																											
974 model 10	1100 models 11, 12	1200 models 13-16																									
[mm]																											
900 model 7	1100 model 9	1200 models 11, 13																									
QUALITY / CERTIFICATE																											
ADDITIONAL PARTS	STABILIZER	STABILIZER	<ul style="list-style-type: none">• STABILIZER (FOR MODELS: 3x11 and 3x13)• STEEL BRACKET																								

CHOOSE THE BEST TELESCOPIC LADDER!

CATEGORIES	TELESCOPIC LADDERS	
		
TELESCOPIC		
LOAD CAPACITY	125 KG	150 KG
STABILIZER		for models 11, 13 
USAGE		
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG	 
FOLDING SYSTEM	BUMPERS	SOFT CLOSE

UNIVERSAL LADDER WHICH ONE TO CHOOSE?






CATEGORIES	UNIVERSAL LADDERS
------------	-------------------



DU 4x3

LOAD CAPACITY	125 KG	125 KG	150 KG
MATERIAL	ALUMINUM	ALUMINUM- STEEL	ALUMINUM
PLATFORM	✓	✓	✓
USAGE			
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG	DECLARATION OF CONFORMITY 125 KG	

LADDER SCAFFOLDING - MODELS

CATEGORIES	LADDER SCAFFOLDING	
		
PLATFORM DIMENSIONS	1,14 x 0,34 m	1,50 x 0,46 m
LADDER WIDTH	0,46 m	0,58 m
RUNG PROFILE	25 x 25 mm	28 x 28 mm
USAGE		
QUALITY / CERTIFICATE	<div>CERTIFICATE</div> <div>EN 131</div> <div>NON PROFESSIONAL USE</div>	<div>CERTIFICATE</div> <div>EN 131</div> <div>PROFESSIONAL USE</div>

WHICH SCAFFOLDING TO CHOOSE?

CATEGORIES

LADDER SCAFFOLDING



PLATFORM DIMENSIONS	1,34 x 0,60 m	1,34 x 0,60 m + side panels	1,30 x 0,60 m
LOAD CAPACITY	150 KG	160 KG	150 KG
STABILIZER LENGTH	1,30 m	1,30 m	1,10 m
MAXIMUM WORKING HEIGHT	4,00 m	4,73 m	4,00 m
QUALITY / CERTIFICATE	<div> <div>CERTIFICATE</div> <div>EN 131</div> <div>PROFESSIONAL USE</div> </div>	<div> <div>CERTIFICATE</div> <div>EN 1004</div> <div>PROFESSIONAL USE</div> </div>	<div> <div>CERTIFICATE</div> <div>EN 131</div> <div>PROFESSIONAL USE</div> </div>



LADDER HOIST



LADDER HOIST




10

LADDER HOIST



- Lightweight aluminum construction that will be perfect for daily support in construction and renovation work
- Easy to assemble and disassemble, and when folded, the compact form will allow for convenient transportation and storage
- All components have a total weight of 90 kg
- Lifting speed as high as 8 meters per minute
- Lifting capacity up to 125 kilograms
- Large transport STANDARD trolley or PV MODULES trolley, which are additionally covered with waterproof non-slip plywood
- Possibility of disassembling side covers in the standard trolley enables transportation of materials of various dimensions
- Drabest ladder hoist has CE declaration, all necessary approvals, and meets health and safety standards
- It will provide you and your employees with many years of safe and comfortable work

LADDER HOIST		
	A [m] HEIGHT TO THE ROOF	6,50
	B [m] LADDER LENGTH	12,5
	C [m] LADDER WIDTH	0,63
	E [m] STABILIZER LENGTH	1,12
	G [m] BRACKET LENGTH	1,90 ÷ 3,30
	WEIGHT [kg]	90
	PACKAGING DIMENSIONS [m]	2,00 x 0,80 x 1,50

■ STANDARD trolley
WT-AL-M-12

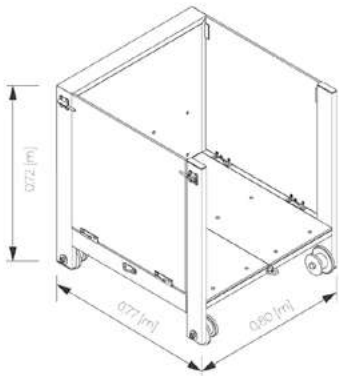

■ PV MODULES trolley
WT-AL-M-12-BW

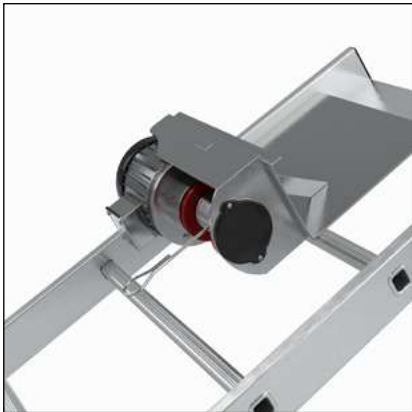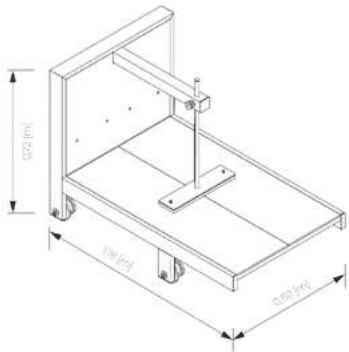

LADDER HOIST		
	MINIMUM ENGINE POWER	1050 W
	SUPPLY VOLTAGE	230 V
	MAX CAPACITY	125 [kg]
	LINE LENGTH	12 [m]
	LIFTING SPEED	8 [m/min.]
	ELECTRIC MOTORINGRESS PROTECTION RATING	IP 54



SINGLE-SIDED ACCESS LADDERS



SINGLE-SIDED ACCESS LADDERS

FOR HOME USE



■ INCLUDED



■ ALD 4 125 KG

14

ALD 125 KG + HOOK - HOME

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER WITH HOOK

- Dedicated for **work in households**
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband **with a hook** for a bucket
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALD 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity **max. 125 kg**

ALD 125 KG + HOOK		NUMBER OF STEPS					
		3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	2,50	2,90	3,60	4,20	4,70	5,60
	DxCxG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

FOR HOME USE



■ INCLUDED



■ ALDP 4 125 KG



15

ALD 125 KG + TOOL SHELF - HOME

DRABINA ALUMINIOWA DOMOWA Z PÓŁKĄ NA NARZĘDZIA WEJŚCIE JEDNOSTRONNE

- Dedicated for **work in households**
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband **with tool shelf**
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALDP 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity **max. 125 kg**

ALD 125 KG + TOOL SHELF	NUMBER OF STEPS	3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	2,50	2,90	3,60	4,20	4,70	5,60
	DXCXG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



■ INCLUDED

■ ALD 4 150 KG

16

ALD 150 KG + HOOK - PRO

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER WITH HOOK

- Dedicated for everyday work in **households, office and warehouse** spaces as well as occasional renovations
- Safe 0,60 [m] headband **with a hook** for a bucket
- Steel powder coated working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees work safety
- Special **non-slip feet, screwed to the profile**
- Notched steps riveted and secured with yellow plastic covers
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

ALD 150 KG + HOOK		NUMBER OF STEPS					
		3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,20	3,70	4,30	5,10	5,80	6,60
	DxCxG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12
	MEASUREMENTS & WEIGHTS MAY VARY +/-5%						

FOR PROFESSIONALS



■ INCLUDED



■ ALDP 4 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE

ALD 150 KG + TOOL SHELF - PRO

ALUMINUM HOUSEHOLD LADDER WITH TOOL SHELF SINGLE-SIDED ACCESS

- Dedicated for work in **households, office and warehouse** spaces
- Light structure, convenient for storage
- Safe 0,60 [m] headband **with tool shelf**
- Steel powder coated platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Notched steps, riveted and secured with yellow plastic covers
- Special **non-slip feet screwed to the profile** to ensure the highest safety standard, protect the floor against scratches!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ALD 150 KG + TOOL SHELF		NUMBER OF STEPS					
		3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,20	3,70	4,30	5,10	5,80	6,60
	DxCxG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



■ INCLUDED



CERTIFICATE
EN 131
PROFESSIONAL USE



■ ALDP+P 4 150 KG

18


ALD 150 KG+TOOL SHELF+HANDRAILS - PRO

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER WITH TOOL SHELF + HANDRAILS

- Dedicated for everyday work in **households, office and warehouse** spaces as well as occasional renovations
- Ergonomic handrails help when using the ladder
- Steel powder coated platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Safe 0,60 [m] headband with tool shelf
- Notched steps riveted and secured with yellow plastic covers
- Special non-slip feet screwed to the profile to ensure the highest safety standard
- Load capacity **max. 150 kg**
- Quality **EN 131**

ALD 150 KG TOOL SHELF + HANDRAILS		NUMBER OF STEPS					
		4	5	6	7	8	
	A [m] WORKING HEIGHT	2,75	2,97	3,19	3,40	3,62	
	B [m] PLATFORM HEIGHT	0,75	0,97	1,19	1,40	1,62	
	C [m] LADDER WIDTH	0,43	0,45	0,48	0,50	0,52	
	D [m] LADDER LENGTH	1,47	1,70	1,93	2,17	2,39	
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	
	WEIGHT [kg]	4,45	5,05	5,85	6,65	7,45	
	DxCxG [m] PACKAGE	1,47x0,43x0,12	1,70x0,45x0,12	1,93x0,45x0,12	2,17x0,50x0,12	2,39x0,52x0,12	

FOR PROFESSIONALS




**50 %
WIDER
STEPS
120 [MM]**



**NEW
TWO-COMPONENT
FEET „CLICK“**

**CERTIFICATE
EN 131
PROFESSIONAL USE**

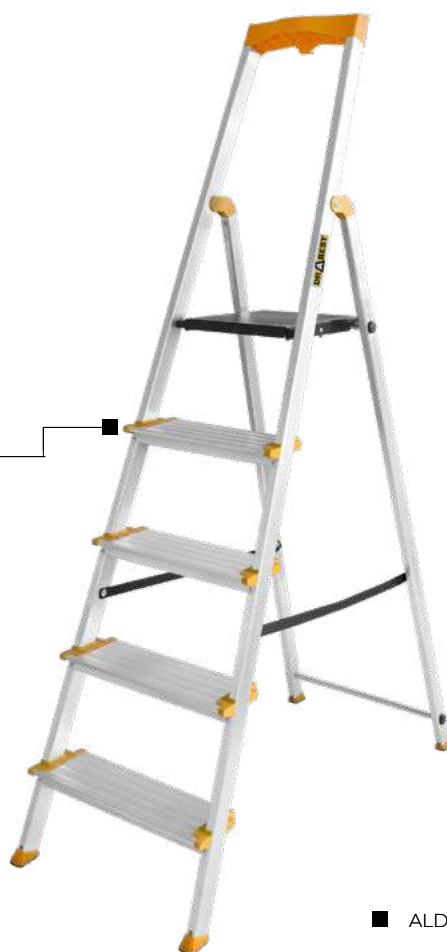

■ ALD MAX 5 150 KG

19

ALD MAX 150 KG - MAX


ALUMINUM SINGLE-SIDED ACCESS LADDER WITH TOOL SHELF

- Dedicated for professionals
- Made of high-quality aluminum
- Comfortable steps with a **width of 120 [mm]**
- First step at a **height of 190 [mm]**
- Tool shelf integrated into the profiles
- New **two-component feet „Click“**, non-slip, easy to replace
- Plastic hinge, clamped in the support and riveted to the shackle
- Load capacity **max. 150 kg**
- Quality **EN 131**

ALD MAX 150 KG	NUMBER OF STEPS	3	4	5	6	7
	A [m] WORKING HEIGHT	2,61	2,82	3,04	3,26	3,47
	B [m] PLATFORM HEIGHT	0,61	0,82	1,04	1,26	1,47
	C [m] LADDER WIDTH	0,43	0,44	0,47	0,49	0,52
	D [m] LADDER LENGTH	1,31	1,54	1,77	2,00	2,24
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,68	4,38	5,08	5,92	7,00
	DXCXG [m] PACKAGE	1,31x0,43x0,12	1,543x0,44x0,12	1,77x0,47x0,12	2,00x0,49x0,12	2,24x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



■ FIBREGLASS 8 150 KG



FIBREGLASS- MAX


- Our fibreglass ladders are constructed from durable, **non-conductive materials**, to provide maximum safety when working at height.
- Highly resistant and can be stored indoors and outdoors up to your convenience
- Wide steps
- Stable and strong fibreglass stringers
- Special non-slip feet
- High safety for **electrical work**
- Load capacity max. **150 kg**
- Quality **EN 131**

FIBREGLASS 150 KG	NUMBER OF STEPS	4	5	6	8	10
	A [m] WORKING HEIGHT	2,01	2,27	2,53	3,05	3,57
	B [m] MAXIMUM ENTRANCE HEIGHT	0,26	0,52	0,78	1,30	1,82
	C [m] LADDER WIDTH	0,45	0,48	0,514	0,583	0,65
	D [m] LADDER LENGTH	1,14	1,42	1,70	2,26	2,82
	G [m] LADDER THICKNESS	0,15	0,15	0,15	0,15	0,15
	WEIGHT [kg]	5,30	6,55	7,50	10,10	12,60
	DxCxG [m] PACKAGE	1,14x0,45x0,15	1,42x0,48x0,15	1,70x0,514x0,15	2,26x0,583x0,15	2,29x0,65x0,15

FOR HOME USE



■ STD 125 KG



■ AVAILABLE

STD 125 - HOME


STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for **work in households**
- Sturdy ladder construction made of powder-coated steel
- Models STD 3-8 powder coated - grey colour
- Models STD 4-6 powder coated - black colour
- Safe 0,60 [m] headband
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Notched and welded steps!
- Special plastic feet ensure work stability
- Load capacity **max. 125 kg**

STD 125 KG	NUMBER OF STEPS	3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,57	2,75	3,00	3,20	3,46	3,68
	B [m] PLATFORM HEIGHT	0,57	0,75	1,00	1,20	1,46	1,68
	C [m] LADDER WIDTH	0,40	0,43	0,46	0,49	0,52	0,55
	D [m] LADDER LENGTH	1,25	1,49	1,73	1,97	2,19	2,43
	G [m] LADDER THICKNESS	0,08	0,08	0,08	0,08	0,08	0,08
	WEIGHT [kg]	4,10	4,90	6,10	7,50	8,80	10,8
	DxCxG [m] PACKAGE	1,25x0,4x0,08	1,49x0,43x0,08	1,73x0,46x0,08	1,97x0,49x0,08	2,19x0,52x0,08	2,43x0,55x0,08

SINGLE-SIDED ACCESS LADDERS

FOR HOME USE

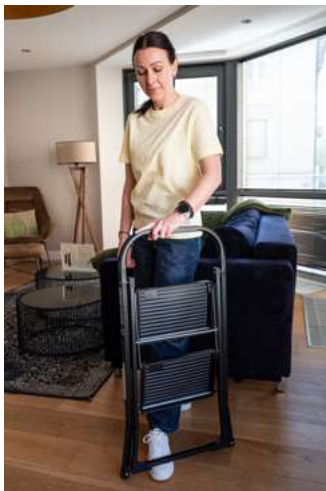

22



■ MINIFERO 2 150 KG



■ MINIFERO 3 150 KG

CERTIFICATE
EN 14183
PROFESSIONAL USE



www.tuv.com
ID: 111129388

MINIFERO 150KG - PRO

STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Sturdy ladder construction made of powder-coated steel
- Steel working platform with a specially embossed surface guarantees safe work
- Wide, notched steps
- Special plastic feet ensure work stability
- Safe headband
- Load capacity **max. 150 kg**
- Quality **EN 14183**
- Certified by TÜV Rheinland GS

MINIFERO 150 KG	NUMBER OF STEPS	2	3
	A [m] WORKING HEIGHT	2,47	2,70
	B [m] PLATFORM HEIGHT	0,47	0,70
	C [m] LADDER WIDTH	0,47	0,47
	D [m] LADDER LENGTH	0,90	1,16
	G [m] LADDER THICKNESS	0,05	0,05
	WEIGHT [kg]	4,03	5,60
	DXCXG [m] PACKAGE	0,90x0,47x0,05	1,16x0,47x0,05

FOR HOME USE



CERTIFICATE
EN 14183
PROFESSIONAL USE



KS 3 150KG



KS 2 150 KG

KS 150 KG - HOME

STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for **work in households**
- Sturdy ladder construction made of powder-coated steel
- Wide steps 0,31 x 0,205 [m] with anti-slip coating
- Special plastic feet ensure work stability
- Comfortable headband
- Load capacity **max. 150 kg**
- Quality **EN 14183**

KS 125 KG	NUMBER OF STEPS	2	3
	A [m] WORKING HEIGHT	2,46	2,69
	B [m] PLATFORM HEIGHT	0,46	0,69
	C [m] LADDER WIDTH	0,47	0,47
	D [m] LADDER LENGTH	1,16	1,40
	G [m] LADDER THICKNESS	0,15	0,15
	WEIGHT [kg]	5,00	7,00
	DxCxG [m] PACKAGE	1,16x0,47x0,15	1,40x0,47x0,15

SINGLE-SIDED ACCESS LADDERS

FOR HOME USE



■ ST TW 1 150 KG



■ ST TW 2 150 KG




CERTIFICATE
EN 14183
PROFESSIONAL USE

ST TW 150 KG - HOME

STEEL HOUSEHOLD SINGLE-SIDED ACCESS STEP STOOL

- Dedicated for everyday **work in households**
- Sturdy ladder construction made of powder-coated steel
- Steel steps with a special surface anti-slip guarantees safe work
- Special plastic feet ensure work stability
- Load capacity **max. 150 kg**
- Quality **EN 14183**

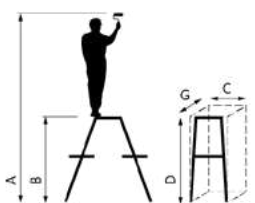ST TW 150 KG	NUMBER OF STEPS	1	2
	A [m] WORKING HEIGHT	-	-
	B [m] PLATFORM HEIGHT	0,27	0,46
	C [m] LADDER WIDTH	0,37	0,37
	D [m] LADDER LENGTH	0,27	0,46
	G [m] LADDER THICKNESS	0,29	0,50
	WEIGHT [kg]	1,65	3,10
	DxCxG [m] PACKAGE	0,27x0,37x0,29	0,46x0,37x0,50

FOR PROFESSIONALS



■ HOP UP 60x60



CERTIFICATE
EN 14183
PROFESSIONAL USE

25

PLATFORM HOP UP - PRO ALUMINUM AND STEEL

- Sturdy construction made of aluminum and steel
- Comfortable work platform available in 3 sizes
- Ideal for low-level work
- A large, ribbed platform and a wide step provide stable access from both sides.
- Special, **non-slip feet**
- Safety hooks to provide security
- Load capacity **max. 150 kg**
- Quality **EN 14183**

HOP UP 150 KG		30x60	30x100	60x60
	A [m] WORKING HEIGHT	2,51	2,51	2,51
	B [m] MAXIMUM ENTRANCE HEIGHT	0,51	0,51	0,51
	C [m] LADDER WIDTH	0,42	0,42	0,63
	D [m] LADDER LENGTH	0,67	1,05	0,71
	G [m] LADDER THICKNESS	0,14	0,14	0,17
	WEIGHT [kg]	3,60	4,00	6,00
	DxCxG [m] PACKAGE	0,67x0,41x0,14	1,05x0,41x0,14	0,70x0,63x0,16



DOUBLE-SIDED ACCESS LADDERS



DOUBLE-SIDED ACCESS LADDERS

FOR HOME USE




DD 6 125 KG

28

DD 125 KG - HOME

ALUMINUM HOUSEHOLD DOUBLE-SIDED ACCESS LADDER

- Dedicated for everyday **work in households**
- Sturdy ladder construction made of durable aluminum
- Light, compact and easy to store
- Convenient work platform 0,16 x 0,34 [m]
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Additional securing belts to prevent sliding
- Load capacity **max. 125 kg**

DD 125 KG	NUMBER OF STEPS	2x2	2x3	2x4	2x5	2x6	2x7	2x8
 MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	2,38	2,20	2,41	2,62	2,83	3,04	3,26
	B [m] PLATFORM HEIGHT	0,38	0,60	0,81	1,02	1,23	1,44	1,66
	C [m] LADDER WIDTH	0,39	0,41	0,44	0,46	0,48	0,51	0,53
	D [m] LADDER LENGTH	0,41	0,63	0,87	1,10	1,33	1,56	1,79
	G [m] LADDER THICKNESS	0,16	0,16	0,16	0,16	0,16	0,16	0,16
	WEIGHT [kg]	1,50	1,80	2,60	3,20	3,90	4,50	6,10
	DxCxG [m] PACKAGE	0,41x0,39x0,16	0,63x0,41x0,16	1,10x0,46x0,16	1,10x0,46x0,16	1,33x0,48x0,16	1,56x0,51x0,16	1,79x0,53x0,16

FOR PROFESSIONALS

DD 2x3 - 2x8



DD 2x2



DD 2x7 150 KG

*Working platform
Models : 2x2 - 2x4



Working platform
Models : 2x5 - 2x8



DD 150 KG - PRO

ALUMINUM HOUSEHOLD DOUBLE-SIDED ACCESS LADDER

- Dedicated for work in **households, office and warehouse** spaces as well as occasional renovations
- Solid ladder construction made of durable aluminum
- Light, compact, easy to store
- Convenient work platform* 0,20 x 0,345 [m]/ 0,16 x 0,34 [m]
- Additional securing belts to prevent sliding
- Notched steps riveted and secured with yellow plastic covers
- Non-slip feet, screwed to the profile
- Load capacity **max. 150 kg**
- Quality **EN 131/EN 14183**
- Certified by **TÜV Rheinland**

DD 150 KG	NUMBER OF STEPS	2x2	2x3	2x4	2x5	2x6	2x7	2x8
	A [m] WORKING HEIGHT	2,38	2,20	2,41	2,62	2,83	3,04	3,26
	B [m] PLATFORM HEIGHT	0,38	0,60	0,81	1,02	1,23	1,44	1,66
	C [m] LADDER WIDTH	0,39	0,41	0,44	0,46	0,48	0,51	0,53
	D [m] LADDER LENGTH	0,41	0,63	0,87	1,10	1,33	1,56	1,79
	G [m] LADDER THICKNESS	0,20	0,16	0,16	0,16	0,16	0,16	0,16
	WEIGHT [kg]	1,70	2,40	3,20	4,20	4,90	5,80	6,80
	DxCxG [m] PACKAGE	0,41x0,39x0,16	0,63x0,41x0,16	1,10x0,46x0,16	1,10x0,46x0,16	1,33x0,48x0,16	1,56x0,51x0,16	1,79x0,53x0,16

DOUBLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



30

CERTIFICATE

EN 131

PROFESSIONAL USE



■ DREW 2x7 150 KG

DREW 150 KG - PRO

WOODEN DOUBLE-SIDED ACCESS LADDER

- Wooden ladder can be used for painting or a variety of other works carried out around the house and in the garden
- Additional elements of the ladder are made of galvanized steel, including a hook mounted at the top of the ladder and reinforcing bars
- Made of impregnated **pine wood**
- Load capacity **max. 150 kg**
- Quality **EN 131**

DREW 150 KG		NUMBER OF RUNGS					
			2x3	2x4	2x5	2x6	2x7
		A [m] WORKING HEIGHT	2,40	2,70	3,00	3,30	3,60
		B [m] MAXIMUM ENTRANCE HEIGHT	0,30	0,59	0,88	1,17	1,46
		C [m] LADDER WIDTH	0,45	0,49	0,53	0,57	0,61
		D [m] LADDER LENGTH	0,95	1,24	1,53	1,82	2,11
		G [m] LADDER THICKNESS	0,13	0,13	0,13	0,13	0,13
		WEIGHT [kg]	5,00	6,00	7,00	8,50	10,0
		DxCxG [m] PACKAGE	0,95x0,45x0,13	1,24x0,49x0,13	1,53x0,53x0,13	1,82x0,57x0,13	2,11x0,61x0,13





TELESCOPIC LADDERS



TELESCOPIC LADDERS

FOR HOME USE

34



■ TELESCOPIC 11 HOME 125 KG



TELESCOPIC LADDER 125 KG - HOME

TELESCOPIC LADDER

- Dedicated for everyday **work in household**
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- Indicators show the locking of individual rungs at the required height
- Dedicated for everyday **work in household**
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- Indicators show the locking of individual rungs at the required height

TELESCOPIC 125 KG		NUMBER OF RUNGS	9	11	13
		A [m] WORKING HEIGHT	3,70	4,30	4,90
		B1 [m] OPENED LADDER LENGTH	2,60	3,20	3,80
		B2 [m] CLOSED LADDER LENGTH	0,88	0,97	1,07
		C [m] LADDER WIDTH	0,47	0,47	0,48
		G [m] LADDER THICKNESS	0,07	0,08	0,09
		WEIGHT[kg]	6,50	8,30	10,5
		B2xCxD [m] PACKAGE	0,88x0,47x0,07	0,97x0,47x0,08	1,07x0,48x0,09

FOR PROFESSIONALS



„SOFT CLOSE”

CERTIFICATE
EN 131
PROFESSIONAL USE



■ TELESCOPIC 11 MAX 150 KG



35

TELESCOPIC LADDER 150 KG - MAX


TELESCOPIC LADDER

- Telescopic ladder is a perfect work tool for specialists looking for the **highest standards of safety and durability**
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- **Indicators show the locking** of individual rungs at the required height
- The highest rung that can be used on the ladder is marked with a yellow color
- **Automatic locking system**
- **Wide and anti-slip feet**
- Additional stabilizer for models 11 and 13
- Made of high-quality aluminum
- Includes a handle underneath steps for easier transportation
- Equipped with a safety belt
- **Quality EN 131**
- Load capacity **max. 150 kg**

TELESCOPIC 150 KG	NUMBER OF RUNGS	9	11	13
	A [m] WORKING HEIGHT	3,37	3,99	4,55
	B1 [m] OPENED LADDER LENGTH	2,63	3,27	3,81
	B2 [m] CLOSED LADDER LENGTH	0,72	0,80	0,91
	C [m] LADDER WIDTH	0,49	0,80	0,88
	G [m] LADDER THICKNESS	0,10	0,10	0,11
	WEIGHT[kg]	8,50	11,3	14,5
	B2xCxD [m] PACKAGE	0,76x0,52x0,09	0,84x0,55x0,09	0,91x0,55x0,10



INDUSTRIAL LEANING LADDERS

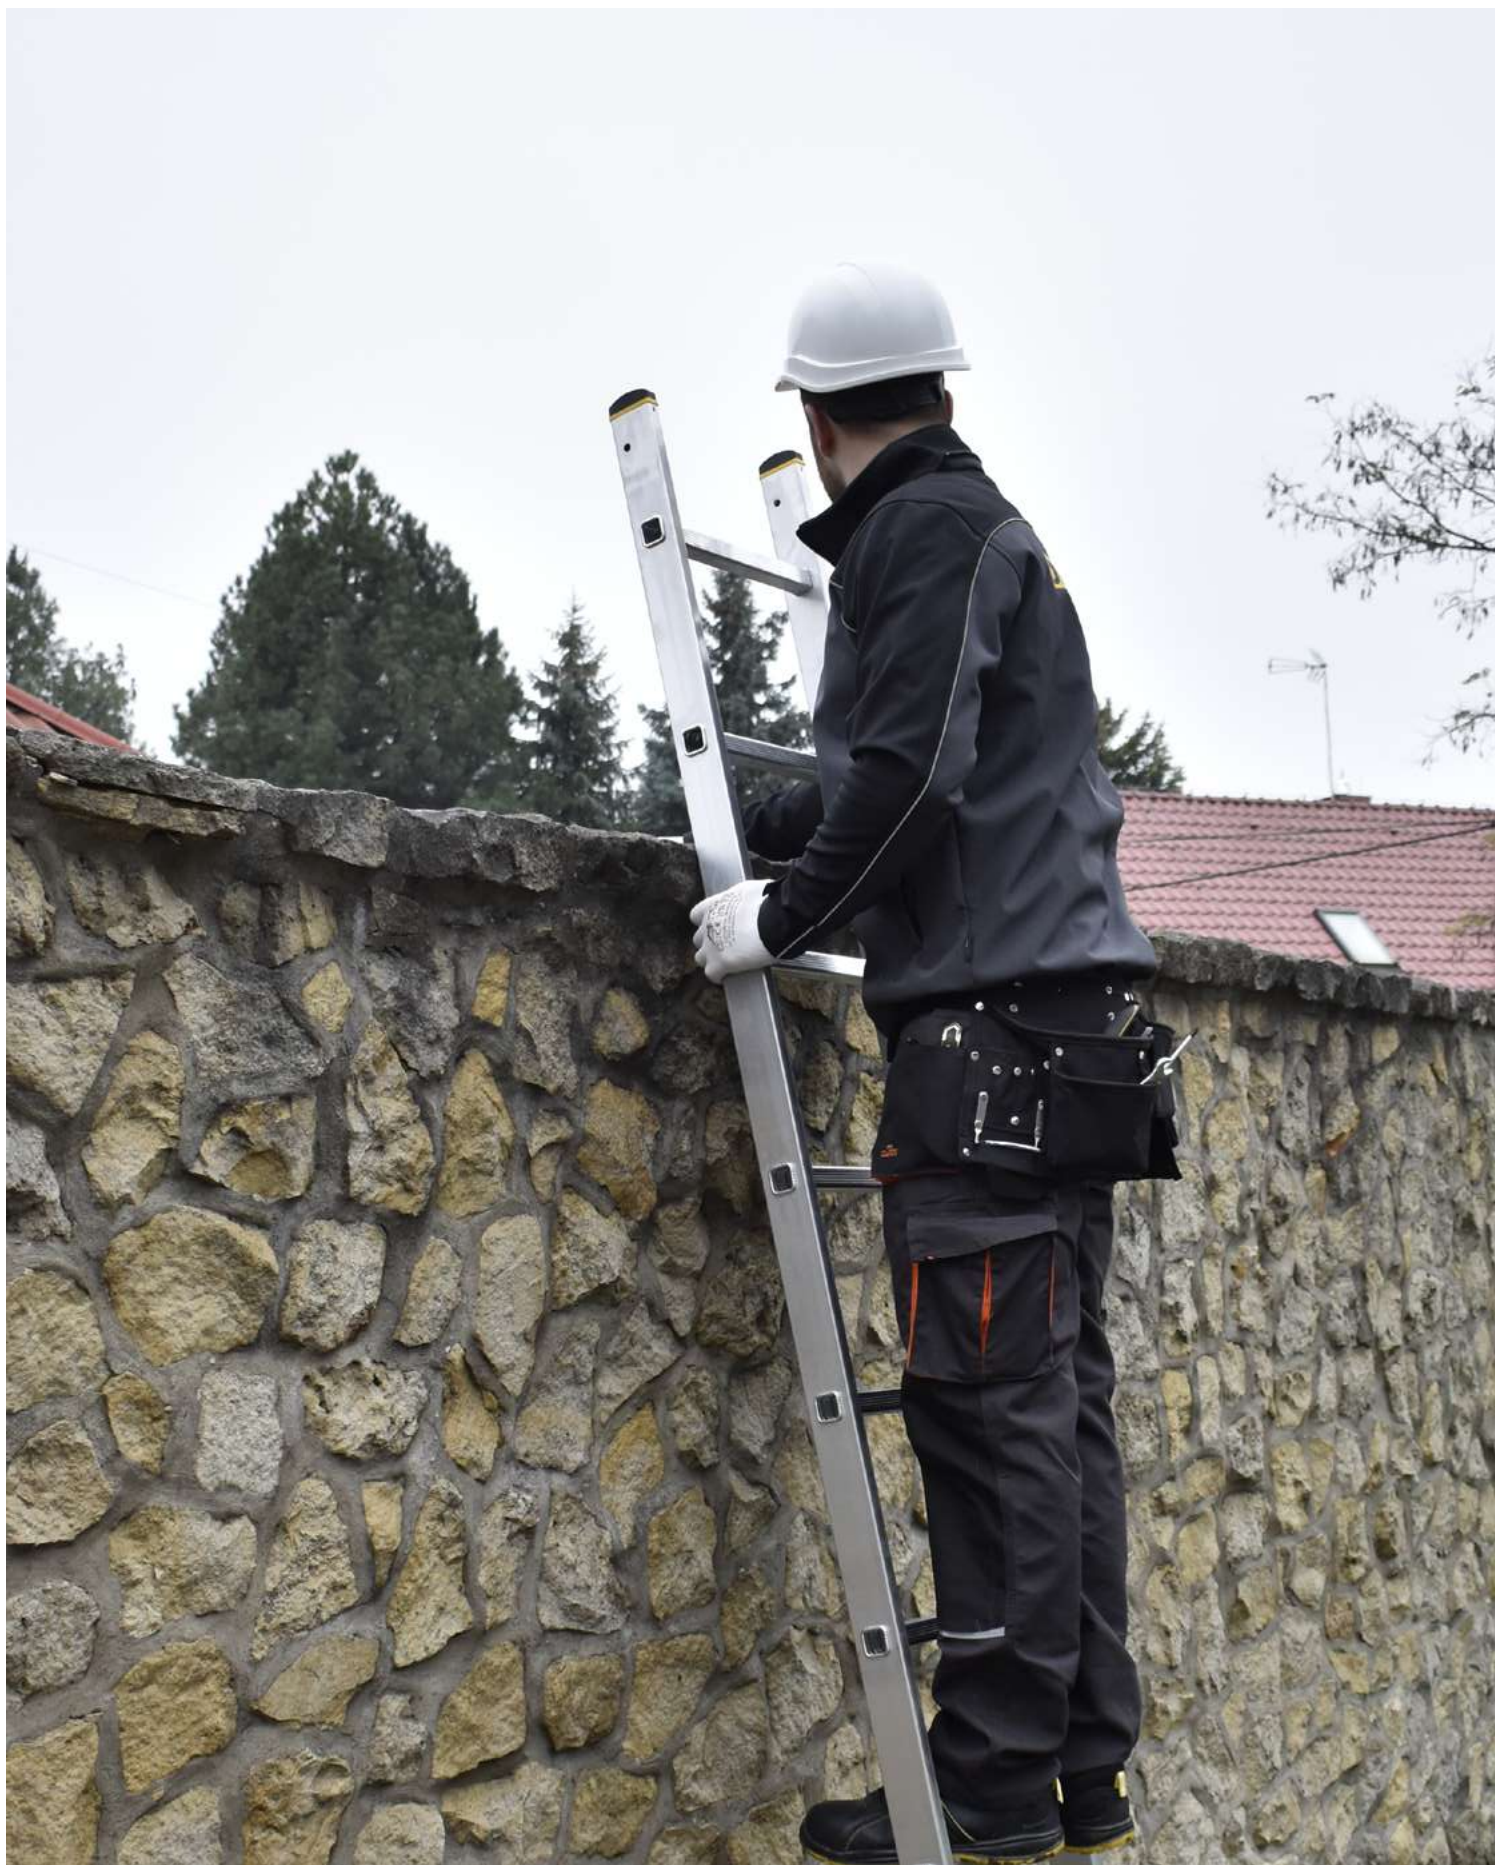

FOR PROFESSIONALS

38




DP PRO 12 150 KG



DP 150 KG - PRO

- Professional leaning ladder PRO, used by thousands of specialists servicing appliances, doing maintenance and finishing interiors
- Models from 12 to 18 steps have an **additional stabilizer**
- Completed with **non-slip feet** that protect against ladder sliding
- Load capacity **max. 150 kg**
- The rungs are grooved to ensure safety, attached to the profile with a strong pressing system, models 5-14 rungs of the 25x25 [mm] profile, models 15-18 rungs of the 28x28 [mm] profile
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DP 150 KG	NUMBER OF RUNGS	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	A [m] WORKING HEIGHT	2,43	2,69	2,98	3,24	3,46	3,72	3,97	4,24	4,50	4,75	5,00	5,26	5,52	5,78
	B [m] LADDER LENGTH	1,39	1,65	1,92	2,18	2,45	2,71	2,98	3,25	3,52	3,78	4,05	4,32	4,58	4,85
	C [m] LADDER WIDTH	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,41	0,41	0,41	0,41
	G [m] LADDER THICKNESS	0,05	0,05	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,08	0,08	0,08	0,08
	S [m] STABILIZER	-	-	-	-	-	-	-	0,825	0,825	0,825	0,825	0,900	0,900	0,900
	WEIGHT [kg]	200	230	270	300	340	370	450	500	550	600	950	1030	1080	1130





TWO-ELEMENT LADDERS



TWO-ELEMENT LADDERS

FOR HOME USE



42

CERTIFICATE
EN 131
NON PROFESSIONAL USE




■ DW HOME 2x6 150 KG

DW 2 150 KG - HOME

ALUMINUM LADDER FOR HOME

- **Two-element ladder** HOME is an excellent tool for home DIY enthusiasts
- **Stabilizer** mounted only with screws! Profile 40x20 [mm]
- Solid hooks and automatic locks
- Rungs with a **25x25 [mm]** profile have grooves, attached to the profile with a strong pressing system
- Clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Load capacity **max. 150 kg**
- Quality **EN 131**

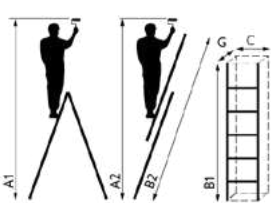DW 2 150 KG	NUMBER OF RUNGS	2x6	2x7
 MEASUREMENTS & WEIGHTS MAY VARY ±5%	A1 [m] WORKING HEIGHT	2,95	3,16
	A2 [m] WORKING HEIGHT	3,70	3,96
	B1 [m] LADDER LENGTH	1,64	1,91
	B2 [m] LADDER LENGTH	2,70	2,97
	C [m] LADDER WIDTH	0,45	0,45
	G [m] LADDER THICKNESS	0,095	0,095
	WEIGHT [kg]	5,50	6,00

FOR PROFESSIONALS



■ DW 2X13 PRO 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE



43

DW 2 150 KG - PRO

DRABINA ALUMINIOWA PRZEMYSŁOWA

- Professional **two-element ladder PRO** is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer mounted only with screws! Profile 60x20 [mm]
- Rungs with a **28x28 [mm]** profile have **grooves**, attached to the profile with a strong **pressing system**
- Clamp-on **anti-slip feet** and bumpers make it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DW 2 150 KG	NUMBER OF RUNGS	2x6	2x7	2x8	2x9	2x10	2x11	2x13	2x14
	A1 [m] WORKING HEIGHT	2,97	3,22	3,47	3,72	3,98	4,23	4,62	4,90
	A2 [m] WORKING HEIGHT	3,98	4,25	4,51	5,02	5,53	5,78	6,55	7,04
	B1 [m] LADDER LENGTH	1,68	1,94	2,20	2,46	2,72	2,98	3,52	3,78
	B2 [m] LADDER LENGTH	2,73	3,00	3,26	3,79	4,32	4,58	5,64	6,17
	C [m] LADDER WIDTH	0,46	0,46	0,46	0,46	0,46	0,46	0,48	0,48
	G [m] LADDER THICKNESS	0,11	0,11	0,11	0,12	0,14	0,14	0,14	0,16
	WEIGHT [kg]	6,30	7,20	7,80	9,00	10,30	11,20	17,20	19,60



THREE-ELEMENT LADDERS



THREE-ELEMENT LADDERS

FOR HOME USE



46

CERTIFICATE
EN 131
NON PROFESSIONAL USE



DW 3 150 KG - HOME

ALUMINUM LADDER FOR HOME

- **Three-element ladder HOME** is an excellent tool for home DIY enthusiasts
- **Stabilizer** mounted only with screws!
- Rungs with a **25x25 [mm]** profile have grooves, attached to the profile with a strong pressing system
- Solid hooks and automatic lock
- Black clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Load capacity **max. 150 kg**
- Quality **EN 131**

DW3 150 KG		NUMBER OF RUNGS		3x6	3x7	3x8	3x9	3x10	3x11
	A1 [m] WORKING HEIGHT	3,17	3,42	3,94	4,49	4,44	5,26		
	A2 [m] WORKING HEIGHT	3,98	4,23	4,97	5,47	5,72	6,55		
	B1 [m] LADDER LENGTH	1,65	1,90	2,20	2,46	2,70	2,99		
	B2 [m] LADDER LENGTH	2,97	3,25	4,02	4,54	4,80	5,64		
	C [m] LADDER WIDTH	0,46	0,46	0,45	0,46	0,45	0,46		
	G [m] LADDER THICKNESS	0,13	0,13	0,16	0,16	0,16	0,18		
	WEIGHT [kg]	8,00	9,00	11,00	12,50	13,50	15,10		



■ DW 3x9 PRO 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE



47

DW 3 150 KG - PRO

INDUSTRIAL ALUMINUM LADDER

- Professional **three-element ladder** PRO is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer** mounted only with screws!
- Rungs with a **28x28 [mm]** profile have **grooves**, attached to the profile with a strong pressing system
- Possibility of using the ladder on stairs!* (See page 69)
- Clamp-on anti-slip feet
- The guides makes it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DW 3 150 KG	NUMBER OF RUNGS	3x6	3x7	3x8	3x9	3x10	3x11	3x12	3x13	3x14	3x15	3x16
	A1 [m] WORKING HEIGHT	3,40	3,75	4,00	4,51	5,01	5,01	6,04	6,56	7,06	7,58	8,08
	A2 [m] LADDER LENGTH	4,43	5,05	5,05	5,83	6,31	6,31	8,09	8,61	9,62	10,39	10,83
	B1 [m] LADDER LENGTH	1,68	1,95	2,20	2,46	2,72	2,98	3,25	3,52	3,78	4,05	4,31
	B2 [m] LADDER LENGTH	3,45	4,09	4,09	4,90	5,39	5,39	7,24	7,77	8,82	9,62	10,07
	C [m] LADDER WIDTH	0,45	0,45	0,45	0,45	0,45	0,45	0,48	0,48	0,48	0,48	0,48
	G [m] LADDER THICKNESS	0,155	0,155	0,155	0,16	0,175	0,175	0,19	0,19	0,22	0,22	0,22
	WEIGHT [kg]	9,10	10,20	11,50	13,00	15,10	16,40	23,00	24,60	30,00	32,00	34,00

THREE-ELEMENT LADDERS

FOR PROFESSIONALS

48



■ DW 3 MAX 3x11 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE

DW3 150 KG - MAX

INDUSTRIAL ALUMINUM LADDER

- Professional **three-element ladder** MAX is a multifunctional tool for **professional and domestic use**
- Movable foot** with a large rubber non-slip surface will adapt the ladder to any type of ground - function to the ground!
- Rubber swivel casters** make it easy to unfold the ladder and protect the wall from damage
- Additional steel **bracket stiffens** the structure in the free-standing position increasing comfort and safety of work
- Sturdy catches, guiding profile elements, automatic locks
- Steel elements are double-protected against corrosion
- Additional stabilizer** in 3x11 and 3x13 models for the third ladder segment provides exceptional stability
- Rungs with 28x28 [mm] profile have grooves
- Load capacity **max. 150 kg**
- Manufactured in accordance with **EN 131**

DW 3 150 KG	NUMBER OF RUNGS	3x7	3x9	3x11	3x13
	A1 [m] WORKING HEIGHT	4,00	4,70	6,10	6,90
	A2 [m] WORKING HEIGHT	5,30	6,13	8,34	10,07
	B1 [m] LADDER LENGTH	2,12	2,71	3,29	3,87
	B2 [m] LADDER LENGTH	4,41	5,30	7,61	9,37
	C [m] LADDER WIDTH	0,45	0,45	0,48	0,48
	G [m] LADDER THICKNESS	0,16	0,18	0,22	0,22
	WAGA [kg]	13,00	16,00	25,70	33,00



■ DW 3 MAX



UNIVERSAL LADDERS



UNIVERSAL LADDERS

FOR HOME USE



PLATFORM
NOT INCLUDED



■ DU 4x3 HOME 125 KG

52

DU 4x3 - 4x4 125 KG - HOME

ALUMINUM LADDER FOR HOME


- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **3 different configurations**
- Includes two stabilizers with profile dimensions of 62x17 [mm], completed with non-slip feet that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- The rungs are **grooved** to ensure safety, attached to the profile with strong pressing system
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Compact and easy to transport
- Load capacity **max. 125kg**

DU 4X3 HOME 125 KG	NUMBER OF RUNGS	4x3	4x4
	A1/A2/A3 [m] WORKING HEIGHT	2,73/3,27/4,05	3,25/4,05/5,10
	B1/B2/B3/B4 [m] LADDER LENGTH	0,98/1,52/3,38/0,91	1,50/2,30/4,46/1,18
	C [m] LADDER WIDTH	0,33	0,33
	G [m] LADDER THICKNESS	0,25	0,25
	WEIGHT [kg]	9,80	12,8
	B4xCxD [m] PACKAGE	0,91x0,33x0,25	1,18x0,33x0,25

FOR HOME USE



■ INCLUDED



■ DU 4x3 HOME 125 KG + PLATFORM

53

DU 4x3 125 KG + PLATFORM - HOME

ALUMINUM LADDER WITH PLATFORM FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **4 different configurations**
- Includes **two stabilizers** with profile dimensions of 62x17 [mm], completed with non-slip feet that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- **Compact** and easy to transport
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- The platform attached to the ladder consists of two steel elements, so the ladder can be used in a platform configuration*
- Load capacity **max.125kg**

DU 4x3 HOME 125 KG + PLATFORM	NUMBER OF RUNGS	4x3
	A1/A2/A3/A4 [m] WORKING HEIGHT	2,65/2,73/3,27/4,05
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,9/0,98/1,52/3,38/0,91
	C [m] LADDER WIDTH	0,33
	G [m] LADDER THICKNESS	0,25
	WEIGHT [kg]	13,20
	B5xCXG [m] PACKAGE	0,91x0,33x0,25


UNIVERSAL LADDERS

FOR HOME USE

54



■ DU 4x3 HOME 125 KG



PLATFORM
NOT INCLUDED

DU 4x3 125 KG - HOME


ALUMINUM AND STEEL LADDER FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **3 different configurations**
- Includes **two stabilizers** with profile dimensions of 62x17 [mm], completed with **non-slip feet** that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- Made of steel and aluminum
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Compact and easy to transport
- Neat, black finish
- Load capacity **max. 125kg**

DU 4X3 125 KG - ALUMINUM+ STEEL	NUMBER OF RUNGS	4x3
	A1/A2/A3 [m] WORKING HEIGHT	2,73/3,26/4,05
	B1/B2/B3/B4 [m] LADDER LENGTH	0,98/1,51/3,37/0,89
	C [m] LADDER WIDTH	0,32
	G [m] LADDER THICKNESS	0,25
	WEIGHT [kg]	10,3
	B4xCxD [m] PACKAGE	0,90x0,33x0,25

FOR HOME USE

INCLUDED



DU 4x3 HOME 125 KG + PLATFORM

55

DU 4x3 125 KG + PLATFORM - HOME

ALUMINUM AND STEEL LADDER WITH PLATFORM FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **4 different configurations**
- Includes two stabilizers with profile dimensions of 62x17 [mm], completed with **non-slip feet** that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- Compact and easy to transport
- Made of aluminum and steel
- The platform attached to the ladder consists of two steel elements, so the ladder can be used in a platform configuration*
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Neat, black finish
- Load capacity **max.125kg**

DU 4X3 125 KG + PODEST - ALUMINUM+ STEEL	NUMBER OF RUNGS	4x3
	A1/A2/A3 [m] WORKING HEIGHT	2,64/2,73/3,26/4,05
	B1/B2/B3/B4 [m] LADDER LENGTH	0,89/0,98/1,51/3,37/0,89
	C [m] LADDER WIDTH	0,32
	G [m] LADDER THICKNESS	0,25
	WEIGHT [kg]	13,7
	B4xCxD [m] PACKAGE	0,90x0,33x0,25


UNIVERSAL LADDERS

FOR HOME USE

56



■ DU 4x3 150 KG HOME



PLATFORM
NOT INCLUDED

DU 4X3 150 KG - HOME

ALUMINUM MULTI-PURPOSE LADDER 4X3


- An aluminum multi-purpose ladder HOME is an excellent tool for home **DIY enthusiasts**
- **Two stabilizers** 60x20 [mm]
- The rungs of the 28x28 [mm] profile are grooved to ensure safety, attached to the profile with a strong **pressing system**
- Black non-slip feet in the stabilizer protect against ladder shifts
- Platform - not included (additional option)
- Load capacity **max. 150 kg**

DU 4X3 150 KG	NUMBER OF RUNGS	4x3
	A1/A2/A3 [m] WORKING HEIGHT	3,01/3,81/4,34
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,90/1,80/2,60/3,45/0,95
	C [m] LADDER WIDTH	0,35
	G [m] LADDER THICKNESS	0,25
	S [M] STABILIZER	0,825 - 2 SZTUKI
	WEIGHT [kg]	15,10
	B5xCxG [m] PACKAGE	0,25x0,95x0,35

FOR PROFESSIONALS



■ DU 4x3 PRO 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE



57

DU 4X3 150 KG +PLATFORM - MAX

ALUMINUM MULTI-PURPOSE LADDER 4X3 WITH PLATFORM

- An aluminum multi-purpose ladder PRO is an excellent tool for **DIY enthusiasts and professionals**
- **Two stabilizers** 60x20 [mm]
- The rungs of the 28x28 [mm] profile are grooved to ensure safety, attached to the profile with a strong **pressing system**
- Black non-slip feet in the stabilizer protect against ladder shifts
- Platform made of waterproof non-slip plywood folds together with the ladder, equipped with a quick snap-in assembly
- Load capacity **max. 150 kg**
- Waterproof non-slip plywood platform included!
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DU 4X3 150 KG + PLATFORM	NUMBER OF RUNGS	4x3
	A1/A2/A3/A4 [m] WORKING HEIGHT	2,90/3,01/3,81/4,34
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,90/1,80/2,60/3,45/0,95
	C [m] LADDER WIDTH	0,35
	G [m] LADDER THICKNESS	0,25
	S [M] STABILIZER	0,825 - 2 SZTUKI
	WEIGHT [kg]	15,10
	B5xCxG [m] PACKAGE	0,25x0,95x0,35



LADDER SCAFFOLDING



LADDER SCAFFOLDING

FOR HOME USE

60



■ ARD 2x8 HOME 150 KG



ARD 150KG - HOME

ALUMINUM SCAFFOLDING


- Dedicated for **work in households**
- Solid scaffolding structure made of aluminum
- Wide **working platform 1,14 x 0,34 [m]**, a special surface of the platform ensures stability and safety during work
- **25x25 [mm] grooved** rungs pressed to the profile
- **Stabilizer** with a lenght 0,90 [m]
- **Special non-slip feet** ensure the highest safety standard
- **3in1:** scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ARD 150 KG	NUMBER OF RUNGS	ARD HOME 2x6	ARD HOME 2x7	ARD HOME 2x8
	A1/A2/A3 [m] WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m] LADDER LENGTH	1,61	1,87	2,14
	B2 [m] LADDER LENGTH	2,67	3,20	3,73
	C [m] LADDER WIDTH	0,46	0,46	0,46
	E [m] WIDTH	0,89	1,14	1,14
	S [m] STABILIZER	0,90	0,90	0,90
	WEIGHT [kg]	11,0	12,0	13,0

FOR PROFESSIONALS



■ ARD 2x8 PRO 150 KG



■ 3w1!

CERTIFICATE
EN 131
PROFESSIONAL USE

61

ARD 150KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- Solid scaffolding structure made of aluminum
- Wide **working platform 1,50 x 0,46 [m]**, special surface of the platform ensures stability and safety during work
- **28x28 [mm] grooved** rungs pressed to the profile
- **Stabilizer** with a dimension 1,10 [m]
- Special **non-slip feet** ensure the highest safety standard
- **3in1**: scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ARD 150 KG	NUMBER OF RUNGS	ARD PRO 2x6	ARD PRO 2x7	ARD PRO 2x8
	A1/A2/A3 [m] WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m] LADDER LENGTH	1,61	1,87	2,14
	B2 [m] LADDER LENGTH	2,67	3,20	3,73
	C [m] LADDER WIDTH	0,58	0,58	0,58
	E [m] WIDTH	1,50	1,50	1,50
	S [m] STABILIZER	1,10	1,10	1,10
	WEIGHT [kg]	16,0	17,0	18,0

LADDER SCAFFOLDING

FOR PROFESSIONALS


62



CERTIFICATE

EN 131

PROFESSIONAL USE



INCLUDED

IKAR

IKAR 150 KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- IKAR aluminum ladder scaffolding is a **mobile structure** for the construction industry
- Wide **working platform 1,30 x 0,60 [m]**
- 28x28 [mm]** grooved rungs pressed to the profile
- Special joints facilitate the assembly of the structure
- Stabilizer with a dimension 1,10 [m]
- Strong plastic wheels
- 3in1**: scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

IKAR 150 KG	NUMBER OF RUNGS	IKAR V1	IKAR V2	
	A1 [m] WORKING HEIGHT	4,00	A2 3,25	
	B1[m] LADDER LENGTH	3,00	A2 3,00	
	C [m] LADDER WIDTH	0,50		
	E [m] WIDTH	1,30		
	S [m] STABILIZER	1,10		
	WEIGHT [KG]	27,0		
	PACKAGE [m]	0,50x0,32x1,65		

FOR PROFESSIONALS



CERTIFICATE
EN 1004
PROFESSIONAL USE



■ HECTOR



■ W ZESTAWIE

63

HECTOR 160 KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- HECTOR aluminum ladder scaffolding is a multi-purpose mobile structure for the construction industry
- Wide **working platform 1,34 x 0,60 [m]**
- **28x28 [mm] grooved** rungs pressed to the profile
- Wall mounting kit included!
- Side protection panels included
- Special joints facilitate the assembly of the structure
- **Stabilizer** with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall.
- Load capacity **max. 160 kg**
- Quality **EN 1004**

HECTOR 160 KG	NUMBER OF RUNGS	HECTOR	
	A1 [m] WORKING HEIGHT	4,73	
	B1[m] LADDER LENGTH	3,91	
	C [m] LADDER WIDTH	0,57	
	E [m] WIDTH	1,51	
	S [m] STABILIZER	1,31	
	WEIGHT [KG]	43,6	
	PACKAGE [m]	0,56x0,325x2,00	

LADDER SCAFFOLDING

FOR PROFESSIONALS



64

■ INCLUDED



■ HECTOR BASIC

CERTIFICATE
EN 131
PROFESSIONAL USE

HECTOR BASIC 150 KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- HECTOR BASIC aluminum ladder scaffolding is a **multi-purpose mobile structure for the construction industry**
- Wide working platform 1,34 x 0,60 [m]
- **28x28 [mm] grooved** rungs pressed to the profile
- Wall mounting kit NOT included
- Load capacity **max. 150 kg**
- Stabilizer with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall
- Special joints facilitate the assembly of the structure
- Quality **EN 131**

HECTOR BASIC 150 KG	NUMBER OF RUNGS	HECTOR BASIC V1	HECTOR BASIC V2	
	A1 [m] WORKING HEIGHT	4,00	A2 2,80	
	B1[m] LADDER LENGTH	3,91	A2 2,00	
	C [m] LADDER WIDTH	0,57		
	E [m] WIDTH	1,51		
	S [m] STABILIZER	1,31		
	WEIGHT [KG]	40,6		
	PACKAGE [m]	0,56x0,325x2,00		



■ HECTOR



ACCESSORIES





UNIVERSAL ROOF HOOK KIT




68

ROOF HOOK KIT

ROOF HOOK KIT - UNIVERSAL - FITS ALL
INDUSTRIALLADDERS

- Special hooks for working on the roof
- Powder coated, steel handle for industrial ladders
- Strong plastic wheels allow the ladder to be moved on the roof!
- Dimensions: 0,50 x 0,22 [m]
- Weight: 2,45 kg

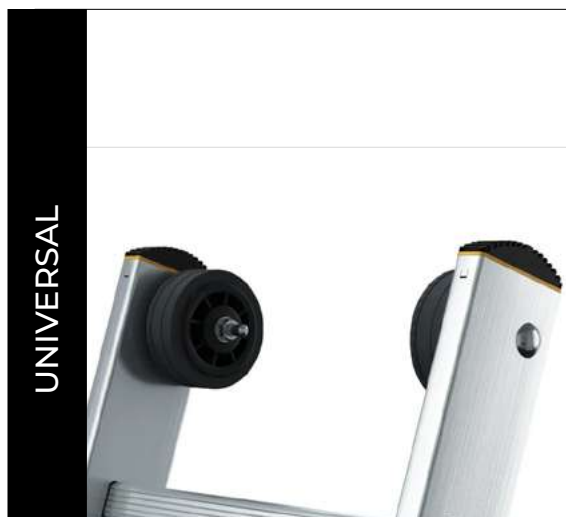


WHEELS FOR INDUSTRIAL LADDERS

FOR ALL DRABEST LADDERS

- Plastic wheels for industrial ladders
- Wheels make it easier to set up the ladder
- Protect surfaces from scratches

BUMPER - SPACER HOLDER


- teel handle for industrial ladders, powder coated
- Dedicated to work on the renovation of walls and cleaning gutters

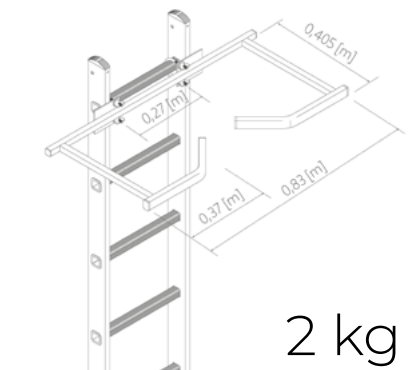

FUNCTION FOR STAIRS

FOR INDUSTRIAL LADDER

- Steel ladder locking system allowing to open a 3-piece ladder on the stairs

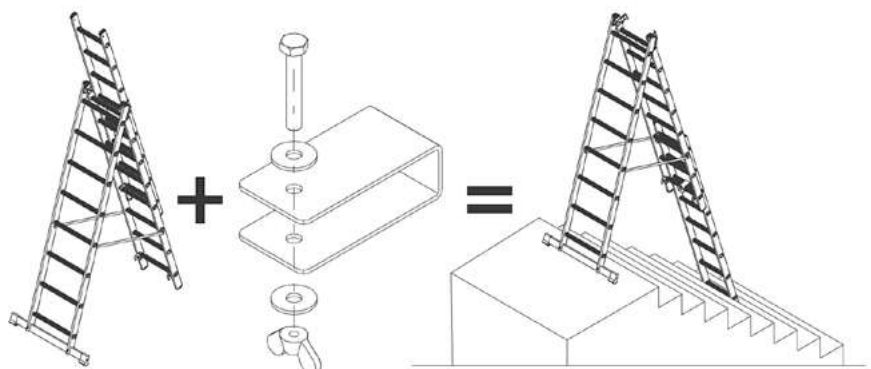

CAR ROOF RACK LADDER CLAMPS



- Roof rack for transporting a ladder on the car
- Easy to assemble!




70

UNIVERSAL WALL-WELDED HANDLE FOR STORING

- Aluminum bracket for storing the ladder on the wall
- Length 0,32 [m]! The longest handle on the market!
- For all types of ladders!

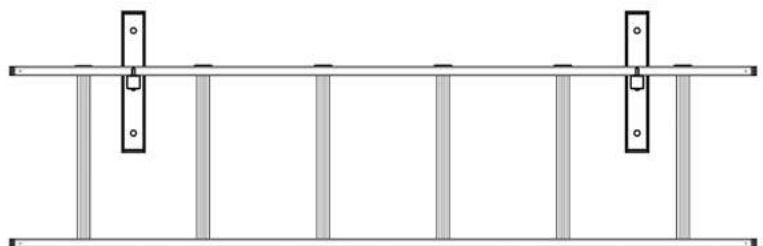

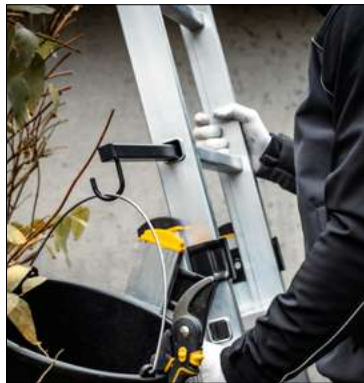

STEEL HOOK FOR THE INDUSTRIAL LADDER

- Powder coated, steel hook
- Dimensions: 0,31 x 0,05 x 0,47[m]; 0,4 kg



STEEL PLATFORM FOR THE INDUSTRIAL LADDER

- For all industrial ladders
- Powder coated steel
- Dimensions: 0,265 x 0,250 [m]; 1,5kg
- Maximum load: 150 kg



HOOK FOR THE HOUSEHOLD LADDER

- Plastic, dyed in mass
- Dimensions: 0,05 x 0,045 x 0,03 [m]
- Maximum load: 10 kg
- For ALD ladders



TOOL SHELF FOR THE HOUSEHOLD LADDER

- Plastic, dyed in mass
- Dimensions: 0,30 x 0,14 x 0,145 [m]; 0,25 kg
- Maximum load: 10 kg
- Equipped with a hook on which you can hang a container with paint






ACCESSORIES



ALUMINUM STABILIZER FOR MULTI-FUNCTIONAL LADDERS

- Strong aluminum profile
- Non-slip plastic feet
- Stabilizes the ladder

Stabilizer assembly instruction
Stabilizer 980, 1100, 1200 [mm]

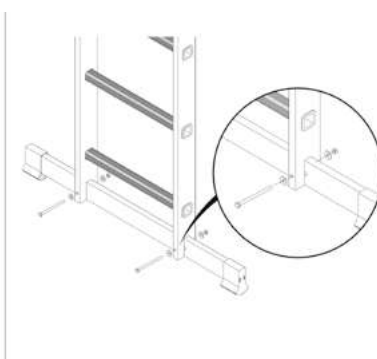


ASSEMBLY INSTRUCTION

72

STABILIZER 900 [MM]



- Profile 60x20 [mm]
- For DW3 PRO*: 3x12, 3x13, 3x14, 3x15, 3x16 *In accordance to the EN 131 standard, a leaning ladder over 3m must have a stabilizer. Stabilizer 900mm is dedicated to the third segment of the ladder used separately as a leaning ladder (not included in set)




900 [mm]

STABILIZER 980 [mm]



- Profile 40x20 [mm]
- For DW3 BASIC: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11




980 [mm]

STABILIZER 1100 [mm]



- Profile 60x20 [mm]
- For DP PRO: 1x12, 1x13, 1x14, 1x15, 1x16, 1x17, 1x18;
DW2 PRO: 2x6, 2x7, 2x8, 2x9, 2x10, 2x11;
DW3 PRO: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11




1100 [mm]

STABILIZER 1200 [mm]



- Profile 60x20 [mm]
- For DW2 PRO: 2x12, 2x13, 2x14
DW3 PRO: 3x12, 3x13, 3x14, 3x15, 3x16



1200 [mm]

NON-SLIP FEET FOR HOUSEHOLD LADDERS

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. Profile 33 x 20 [mm] - for ALD household ladders
 02. Profile 40x20 [mm] - for ALD and DD household ladders



TWO-COMPONENT FEET FOR MULTIFUNCTIONAL LADDERS

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. Profile 50 x 20 [mm]
 02. Profile 60 x 20 [mm]
 03. Profile 70 x 20 [mm]
 04. Profile 82 x 25 [mm]
 05. Profile 95 x 25 [mm]



PRO I MAX



NON-SLIP FEET FOR STABILIZER

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. For the stabilizer with a profile of 40 x 20 [mm]
 02. For the stabilizer with a profile of 60 x 20 [mm]





FIRE ESCAPE LADDERS




FIRE ESCAPE LADDERS

The fire escape ladders are an original system developed by the designers at Drabest, who aimed to support the construction industry in the rapidly rising structures. Ready ladder sets are dedicated to overcoming heights ranging from 3 to 10 meters, available in steel or aluminum versions to best match the ladder to the facility. Steel ladders perform well in adverse weather conditions - they are perfect for outdoor use, in large multi-family and industrial buildings. The advantage of aluminum evacuation ladders is their low weight and modern appearance, making this type of structure ideal for smaller residential buildings, both indoors and outdoors

MODULAR EVACUATION LADDERS advantages:

- High quality
- Easy installation
- Self-assembly modules
- Different sets are easily adapted to the height of the object
- Modular evacuation steel ladders made of hot-dip galvanized steel
- Modular evacuation aluminium ladders made of aluminium

76

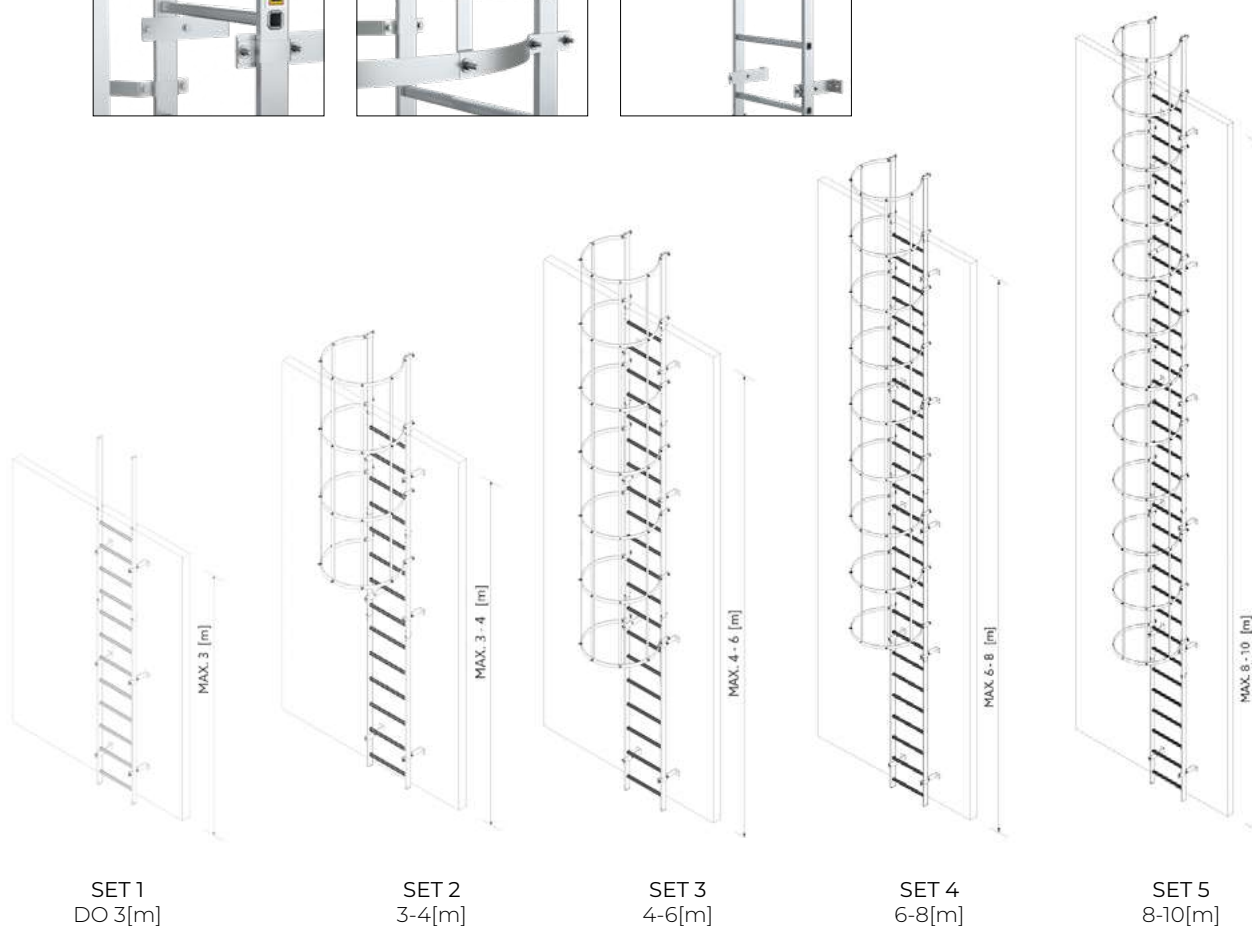

SET 1
DO 3[m]

SET 2
3-4[m]

SET 3
4-6[m]


SET 4
6-8[m]

SET 5
8-10[m]

CUSTOM-MADE LADDERS

We design and manufacture individualized steel evacuation ladders tailored to the client's requirements and facility. Drabest brand evacuation ladders meet all necessary standards, possess safety and health certificates, ensuring safety and comfort during work. The vertical evacuation ladder is permanently mounted on buildings or machinery, and its primary function is to provide a fully secure means of accessing the structures to which it is attached

- 35 years of experience in the special construction industry!
- Customized construction tailored to your facility.
- On-time execution.
- Free quote - send inquiries to uslugi@drabest.pl.
- We also undertake individual steel constructions on request, such as bicycle racks or warehouse stairs.








PROFESSIONAL LADDERS MADE FOR 35 YEARS!

PROFESSIONAL LADDERS MADE FOR 35 YEARS!

Drabest was established on 15 December 1990 in Krakow by Piotr Paluch. Since then, it has been pursuing its mission to „provide people with products of the top quality for a reasonable price while ensuring safety at heights.” The company has been developing dynamically on the domestic market and conquering new foreign markets for over 30 years. The successive expansion of the assortment offered to our customers and many years of experience allow us to meet the needs of every user. We currently manufacture various types of aluminium and steel structures for industrial and domestic use. Currently, the available products are: HOME - made for home use, PRO - for professional use, and the MAX line intended for professionals.

TOP QUALITY!

By choosing Drabest products you receive top-quality equipment for the work at heights, including scaffolding and ladders. Here you have the offer of one of the leading Polish companies in this industry. The extensive portfolio of the Drabest products is a perfect solution for a wide range of construction and renovation works, as well as for domestic use.

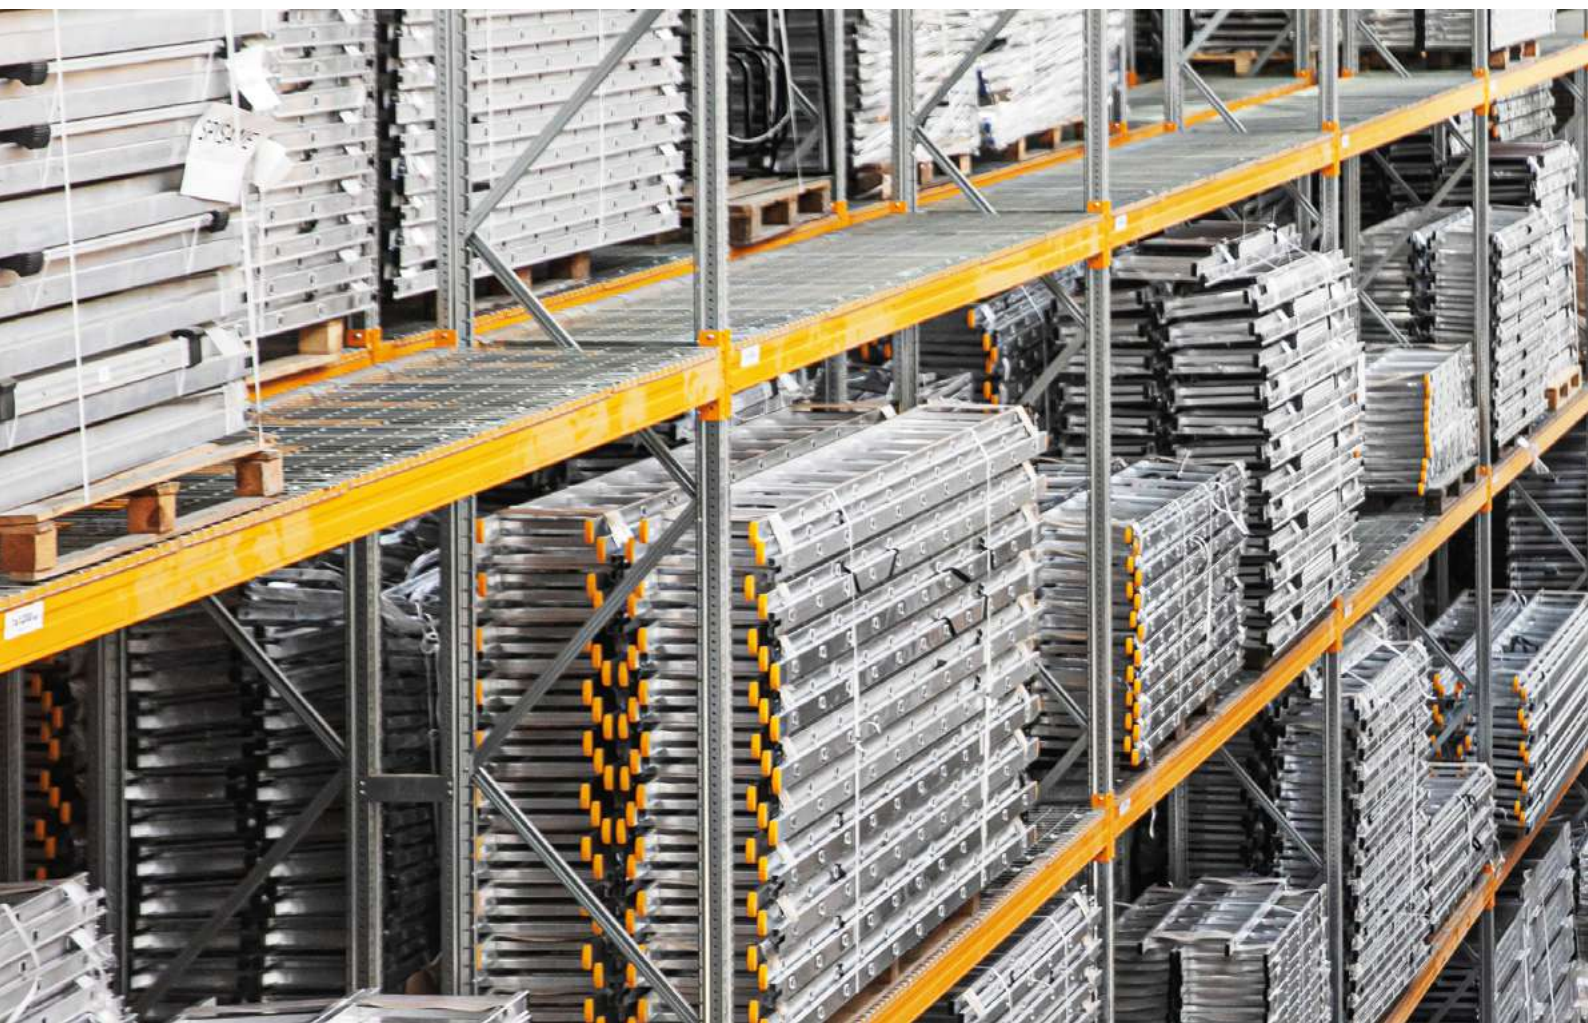



DRABEST SP. Z O.O.

Mników 281,
32-084 Morawica, Polska
www.drabest.pl
www.drabest.com

Handel@drabest.pl
Export@drabest.pl
Sklep@drabest.pl